STEAM SOLUTIONS FOR HEALTHY LIVING

2018 PRICE BOOK FOR RESIDENTIAL AND COMMERCIAL STEAM BATH GENERATORS



STEAM. SAUNA. SOLUTIONS.

AMEREC

P.O. Box 2258 | 17683 128th Place NE, #C | Woodinville, WA 98072, USA Toll-Free 1-800-331-0349

amerec@amerec.com | www.amerec.com

Amerec reserves the right to change specifications and design without notice. © 2018 Amerec Steam

4213-16 01/18

AX STEAM GENERATORS

Performance Features of Amerec AX Generators

- Sequential Temperature Control delivers a more consistent flow of Soft Steam and a more stable, comfortable steam bath experience.
- 4 sizes handle a range of steam bath sizes up to 550 cubic feet.
- AX generators can be connected together to heat steam baths larger than 550 cubic feet.
- Intelligent start pre-heats baths to be ready when needed.
- Warm Start, a feature used in Day Spas and for use with A6 control only, maintains a tank water temperature at just below boiling, which reduces heating time by 2-3 minutes. Warm Start cables must be ordered separately.* (Specify when ordering)
- 240 and 208 volt models can be wired in the field for 1 or 3 phase power.
- Stainless steel tank and water level probes provide years of trouble-free operation.
- Removable heating elements provide easy and economical service.



How to select the proper AX generator kW size:

- Step 1Calculate the cubic footage of the steam room by
multiplying Length x Width x Height = cubic feet.
(Maximum recommended ceiling height is 8')
- Step 2 If wall and ceiling surface material is natural stone (marble, granite, slate, travertine, porcelain tile, etc.) multiply cubic footage in Step 1 by 1.75 = cubic feet.
- Step 3Select the appropriate kW size generator based on cubic
footage range below.

Model	kW	Cubic Footage Min – Max	240 Volt 1 or 3 Phase Item No.	208 Volt 1 or 3 Phase Item No.	List Price
AX4.5	4.5	60-90	9016-120	9016-150	\$ 2,150
AX7.5	7.5	80 - 200	9016-400	9016-500	\$ 2,640
AX11	11.2	175 - 375	9016-600	9016-700	\$ 3,080
AX14	14.1	350 - 550	9016-800	9016-900	\$ 3,520

Warm Start Cable 8855-139

Ganging Cable 8855-138

AX CONTROL PACKAGES ALL NEW A6 TOUCH SCREEN CONTROL & ACCESSORY PACKAGES FOR QUICK & EASY ORDERING

A6 Touch Screen Control Features

- 4.3" capacitive touchscreen.
- Low profile surface mount or recessed mount assembly available.
- Intelligent Start pre-heats bath to be ready when needed.
- Temperature control and time duration adjustments.
- Controls colored lights and fragrance injector options.
- Monthly calendar programming.
- Weekday programming.
- Stores favorite bath settings.
- "amerecConnect" Wi-Fi app controls bath operation.
- Multiple languages.
- Energy saving function Standby mode.
- Dimensions 3.5"W x 5.0"H x 0.53"D





Olympic Package

- Includes: 1 A6 Touch Screen Control
 - 1 ComfortFlo Steam Head
 - 1 3DTX Auto Drain
 - 1 ADP Drip Pan

Olympic Package-CP Olympic Package-WH Olympic Package-PN Olympic Package-BN Olympic Package-ORB

Polished Chrome	9016-101	\$1,750
White	9016-104	\$1,750
Polished Nickel	9016-105	\$1,750
Brushed Nickel	9016-106	\$1,750
Oil Rubbed Bronze	9016-107	\$1,750

Cascade Package



Includes: 1 - A6 Touch Screen Control

- 1 ComfortFlo Steam Head
- 1 3DTX Auto Drain
- 1 ADP Drip Pan
- 2 Chromatherapy Lights
- 1 Fragrance Injector Pump

Cascade Package-CP Cascade Package-WH Cascade Package-PN Cascade Package-BN Cascade Package-ORB

9026-101	\$3,300
9026-104	\$3,300
9026-105	\$3,300
9026-106	\$3,300
9026-107	\$3,300
	9026-104 9026-105 9026-106

A6 Touch Screen Control Panel Kit, Dimensions 3.5"W x 5.09"H x 0.53"D



\$ 180

3.5"

LED Light Kit - For use with A6 Control Only

Chromatherapy/ White light kit includes two (2) LED's, housing and transformer. Maximum of two (2) LED's per transformer. Amerec A6 will control LED light systems.

LED Kit-AX	Chromatherapy/White LED Kit	9223-216	\$ 850
------------	-----------------------------	----------	--------

Fragrance Injector Pump Kit - A6 Control Must be Used

Delivers essence oils directly into the copper steam line. Pump kit includes pump, one (1) 16 oz. bottle of Eucalyptus oil and wall mounted caddy.

A220FP-2	Fragrance Injector Kit	9223-224	\$ 825
Fragrance, Eucalyptu	us, Supreme Grade, 100% Pure		
Eucalyptus-2	2 oz. bottle	9253-171	\$ 15
Eucalyptus-8	8 oz. bottle	9253-172	\$ 30
Eucalyptus-16	5 16 oz. bottle	9253-1731	\$ 60
Eucalyptus-64	4 1 gallon jug	9253-175	\$ 250

BlueCube Steam Shower Sound System

The BlueCube Steam Shower Sound System offers superior sound quality for your personal steam shower. The BlueCube hideaway stereo is designed to be out-of-sight and plays music wirelessly via a Bluetooth enabled device or Smartphone. Includes an RF 2-way remote control and a pair of waterproof flush-mount 2-way speakers.

BLUECUBE	Sound System, Speakers	9252-058	\$1,300
SPEAKERS	Waterproof Speakers, 1 pair	9252-030	\$ 500

Wall Mount, Fold	Down Teak Shower Seat		
TEAK SEAT	20" x 13" Teak Seat	9270-029	\$ 3

Wall Mount, Fold Down White Relax Showe	r Seat		1 1
RELAX 13 ½" x 9 ¼" White Seat	9270-02	\$ 130	and the second s

ASX120 Dual Cartridge Scale-X Water Treatment System

ASX120	Scale-X Water Treatment System	9209-012	\$ 600
ASX120-RFK	Cartridge Replacement Kit	9209-042	\$ 200









330





AK STEAM GENERATORS

Performance Features of Amerec AK Generators

- Sequential Temperature Control delivers a more consistent flow of Soft Steam and a more stable, comfortable steam bath experience.
- 4 sizes handle a range of steam bath sizes up to 550 cubic feet.
- AK generators can be connected together to heat steam baths larger than 550 cubic feet.
- 240 and 208 volt models can be wired in the field for 1 or 3 phase power.
- Stainless steel tank and water level probes provide years of trouble-free operation.
- Removable heating elements provide easy and economical service.



How to select the proper AK generator kW size:

- Step 1Calculate the cubic footage of the steam room by
multiplying Length x Width x Height = cubic feet.
(Maximum recommended ceiling height is 8')
- Step 2 If wall and ceiling surface material is natural stone (marble, granite, slate, travertine, porcelain tile, etc.) multiply cubic footage in Step 1 by 1.75 = cubic feet.
 Step 3 Select the appropriate kW size generator based on cubic footage range below.

Model	kW	Cubic Footage Min – Max	240 Volt 1 or 3 Phase Item No.	208 Volt 1 or 3 Phase Item No.	List Price
AK4.5	4.5	60 – 90	9012-100	9012-200	\$ 1,800
AK7.5	7.5	80 – 200	9012-105	9012-205	\$ 2,040
AK11	11.2	175 – 375	9012-110	9012-210	\$ 2,370
AK14	14.1	350 - 550	9012-115	9012-215	\$ 3,195

Ganging Cable

5304-031



<u>Model Des</u>	cription	ltem No.	Lis	<u>t Price</u>
ADK	Automatic Drain Valve Kit for AK Series generators. Automatically drains and flushes tank after each steam bath. Order one (1) ADK drain for each generator wh	9210-200 en ordering ganged	\$ d syste	400 ms.
Model Des	cription	ltem No	Lis	t Price



<u>Model Desc</u>	ription	ltem No.	List l	Price
ADP	Stainless Steel generator drip pan with threaded drain fitting.	9210-110	\$1	50

STEAM BATH CONTROLS FOR AK SERIES GENERATORS

KT60 Digital Control with Built-In Temperature Sensor

KT60 3-button digital control with on/off, temperature and time duration setting.

Display alternates between ambient room temperature and time remaining.

- Features integral temperature sensor and must be mounted inside steam room.
- Control kit includes KT60 control, cable and ComfortFlo steam head.

Model	Finish	ltem No.	<u>List Price</u>
KT60-CP	Polished Chrome	9111-101	\$ 760
KT60-PN	Polished Nickel	9111-105	\$ 760
KT60-BN	Brushed Nickel	9111-106	\$ 760
KT60-ORB	Oil Rubbed Bronze	9111-107	\$ 760



K60 Digital Control with Remote-Mounted Temperature Sensor

- K60 3-button digital control with on/off, temperature and time duration setting.
- Display alternates between ambient room temperature and time remaining.
- Features remote sensor and can be mounted inside or outside steam room.
- Control kit includes K60 control, sensor, cables and ComfortFlo steam head.

Model	Finish	ltem No.	List Price
K60-CP	Polished Chrome	9101-101	\$ 780
K60-PN	Polished Nickel	9101-105	\$ 780
K60-BN	Brushed Nickel	9101-106	\$ 780
K60-ORB	Oil Rubbed Bronze	9101-107	\$ 780



- DKT60/K60 dual 3-button digital controls display temperature and time.
- Adjustable time duration up to 60 minutes and temperature up to 125° F.
- Both controls alternately display room temperature and time remaining.
- KT60 features integral temperature sensor and mounts inside room.
- K60 control mounts outside room.
- Dual control kit includes two controls, cables and ComfortFlo steam head.

Model	Finish		ltem No.	Lis	<u>st Price</u>
DKT60/K60-CF	P Polish	ed Chrome	9113-101	\$	1,355
DKT60/K60-PI	N Polish	ed Nickel	9113-105	\$	1,355
DKT60/K60-BI	N Brush	ed Nickel	9113-106	\$	1,355
DKT60/K60-O	RB Oil Ru	bbed Bronze	9113-107	\$	1,355

R30K On/Off Non-Thermostatic Control

- R30K basic on/off control.
- Green indicator light illuminates during generator operation.
- Control can be mounted inside or outside steam room.
- Control kit includes R30K control, cable and ComfortFlo steam head.

Model	Finish	ltem No.	List Price
R30K-CP	Polished Chrome	9141-101	\$ 235
R30K-BN	Brushed Nickel	9141-106	\$ 235
R30K-ORB	Oil Rubbed Bronze	9141-107	\$ 235









AK STEAM BATH ACCESSORIES

BlueCube Steam Shower Sound System

The BlueCube Steam Shower Sound System offers superior sound quality for your personal steam shower. The BlueCube hideaway stereo is designed to be out-of-site and plays music wirelessly via Bluetooth enabled device or smartphone. Includes an RF 2-way remote control and a pair of waterproof flush-mount 2-way speakers.

Model		ltem No.	List Price
BLUECUBE	Sound System, Speakers	9252-058	\$ 1,300
SPEAKERS	Waterproof Speakers, 1 Pair	9252-030	\$ 500

LED Light Kit - For use with K60 or KT60 Control Only

Chromatherapy/ White light kit includes two (2) LED's, housing and transformer. Maximum of two (2) LED's per transformer. Separate control provided in package to control lights.

LED Kit-AK Chromatherapy/White LED Kit	9223-214	\$ 900
--	----------	--------

Fragrance Injector Pump Kit - For AK Models

Delivers essence oils directly into the copper steam line. Pump kit includes on/off control, one (1) 16 oz bottle of Eucalyptus oil and wall mounted caddy.

Model	ltem No.	List Price
A220FP	9223-227	\$ 850

Fragrance, Eucalyptus, Supreme Grade, 100% Pure

Model		ltem No.	List Price
Eucalyptus-2	2 oz. bottle	9253-171	\$ 15
Eucalyptus-8	8 oz. bottle	9253-172	\$ 30
Eucalyptus-16	16 oz. bottle	9253-173	\$ 60
Eucalyptus-64	1-gallon jug	9253-175	\$ 250

Wall Mount, Fold Down Teak Shower Seat

Model		ltem No.	List Price
Teak Seat	20" x 13" Teak Seat	9270-029	\$ 330

Wall Mount, Fold Down White Shower Seat

<u>Model</u>		ltem No.	List Price
Relax	13 1/2" x 9 1/4" White Seat	9270-02	\$ 130












AI SERIES COMMERCIAL STEAM BOILERS ALL MODELS NOW INCLUDE LOW WATER CUT-OFF

Ideal for large steam rooms, the Amerec AI Series is designed for user enjoyment, ease of operation and long life. The AI boilers are engineered for easy on-site maintenance and hands-off, automated operation. Amerec engineering and technology incorporates several unique features, making the AI Series the ideal choice for large commercial steam rooms.

AI Series Boiler Features

- ASME H-Stamped Low-Pressure Vessel, National Board registered.
- UL Listed, cUL Listed
- All steel construction with powder coat finish and stainless steel feet to prevent corrosion.
- Multiple safety features, including:
 - Sight Glass
 - · Three-level water sensing system with low water cutoff
 - Control system per CSD-1
- Room "over-temperature shut down" turns boiler elements off and blinks indicators to show alarm.
- Designed for easy serviceability:
 - Simple service access and control
 - Indicator lights with integral diagnostics
- One steam valve for single room operation.
- One or two-room operation with each room controlled individually. Requires 2-room thermostatic control kit.
- CoolFlush™ Auto Drain option performs recommended daily draining and flushing to reduce sludge and scale build up:
 Anti-vacuum drain system reduces gurgling noises and slow draining.
 - Cools water in tank to 140°F or less to prevent damage to plumbing drain system.
 - Drain clock allows system to start at desired time of day, whether the generator is on or off.
- Low Water Cut-Off (LWCO) with manual reset prevents heating should the water level drop below safe levels.
- Optional 24-hour and 24-hour / 7-day integral run and drain clocks.
- Optional "Refresh" control provides short bursts of steam on demand with a simple push button inside the steam room.
 Provides a 15 to 20 second burst of steam even if the room is at set temperature and not calling for steam.

AI Series Commercial Steam Boiler Dimensions

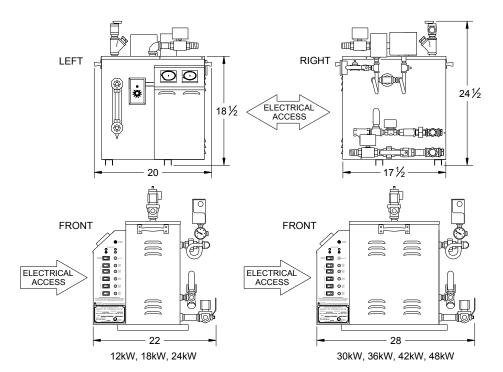



AI SERIES COMMERCIAL STEAM BOILERS ALL MODELS NOW INCLUDE LOW WATER CUT-OFF





Note: It is recommended that one steam head be installed for every 12 kW. Thermostat kits required for each boiler include two (2) steam heads. Please order additional steam heads as required for 30 kW and larger AI boilers.

		Max Cubic	Steam Lbs.	Elect	rical Spe	cificatior	ıs	
Model	kW	Footage	Per Hour	Volts	Phase	Amps	ltem No.	List Price
AI-12	12	550	36	208	1	59	9006-120	\$ 6,450
AI-12	12	550	36	240	1	51	9006-121	\$ 6,450
AI-12	12	550	36	208	3	34	9006-123	\$ 6,450
Al-12	12	550	36	240	3 3 3	30	9006-124	\$ 6,450
Al-12	12	550	36	415		18	9006-125	\$ 6,450
Al-12	12	550	36	480	3	15	9006-126	\$ 6,450
AI-18	18	900	54	208	1	88	9006-180	\$ 6,950
AI-18	18	900	54	240	1	76	9006-181	\$ 6,950
AI-18	18	900	54	208	3	51	9006-183	\$ 6,950
AI-18	18	900	54	240	3 3	44	9006-184	\$ 6,950
AI-18	18	900	54	415	3	27	9006-185	\$ 6,950
Al-18	18	900	54	480	3	22	9006-186	\$ 6,950
AI-24	24	1200	73	208	1	116	9006-240	\$ 8,000
AI-24	24	1200	73	240	1	101	9006-241	\$ 8,000
AI-24	24	1200	73	208	3	68	9006-243	\$ 8,000
AI-24	24	1200	73	240	3	59	9006-244	\$ 8,000
AI-24	24	1200	73	415	3	36	9006-245	\$ 8,000
AI-24	24	1200	73	480	3	29	9006-246	\$ 8,000
AI-30	30	1500	91	208	3	85	9006-303	\$ 9,000
AI-30	30	1500	91	240	3 3	73	9006-304	\$ 9,000
AI-30	30	1500	91	415	3	44	9006-305	\$ 9,000
AI-30	30	1500	91	480	3	36	9006-306	\$ 9,000
AI-36	36	1800	109	208	3	101	9006-363	\$ 9,500
AI-36	36	1800	109	240	3	88	9006-364	\$ 9,500
AI-36	36	1800	109	415	3	53	9006-365	\$ 9,500
AI-36	30	1800	109	480	3	43	9006-366	\$ 9,500
AI-42	42	2100	127	208	3	118	9006-423	\$ 10,000
AI-42	42	2100	127	240	3	102	9006-424	\$ 10,000
AI-42	42	2100	127	415	3	62	9006-425	\$ 10,000
AI-42	42	2100	127	480	3	51	9006-426	\$ 10,000
AI-48	48	2400	145	240	3	117	9006-484	\$ 10,500
AI-48	48	2400	145	415	3	70	9006-485	\$ 10,500
AI-48	48	2400	145	480	3	58	9006-486	\$ 10,500
Please s	select r	equired and	optional co	ontrois foi	' Al Seri	es Rolle	rs on next pa	ge.

ct required and optional controls for Al Series Boilers on next page.



Club 190 Steam Door handicap accessible, ADA compliant.

A heavy glass door with sturdy aluminum frame. Excellent for high use commercial applications.

- Door opening is 36" x 84"; frame size is 39-1/2" x 85-3/4"
- Custom sizes available. Please call for quote.
- Vinyl sweep.
- Hydraulic closer included. Closer to be mounted on exterior side of door.
- Push Pull handles included.
- 31-3/8" x 70-1/8" clear 1/4" tempered glass.
- Optional 1" insulated glass provides increased thermal efficiency.

Standard 40" x 86" door with Aluminum frame Add for Bronze frame Add for 1" insulated glass **Custom Size Doors**

2,900 \$ 275 \$ \$ 275 Call for Quote

One of the following thermostatic control kits is required for all AI Series boilers.

Model	Description	Item Number	List Price	
T100B-1	T100 Touch control kit for 1 room installation. For use with all models.	9150-103	\$ 1,450	
	Includes Touch screen control, sensor, cables and 2 e 3/4" Chrome steam heads.	2a.		114 1999
T100B-2	T100 Touch control kit for 2 room installation. 12-24kW models.	9150-104	\$ 2,850	
	T100 Touch control kit for 2 room installation. 30-48kW models Includes 2 Touch controls, 2 sensors, cables, 1 steam solenoid valve assembly and 4 ea.	9150-106	\$ 2,850	
	3/4" Chrome steam heads.			
IT1	Thermostat for 1 room installation. For use with all models.	9226-30	\$ 350	
	Includes thermostat control, sensor, cables and 2 ea. 3/4" Chrome steam heads.			
IT2	Thermostat for 2 room installation. 12-24kW 208V, 240V & 480V models.	9226-20	\$ 1,250	
IT2	Thermostat for 2 room installation. 12-24kW 415V Export models.	9226-21	\$ 1,250	
IT2	Thermostat for 2 room installation. 30-48kW 208V, 240V & 480V models.	9226-22	\$ 1,250	
IT2	Thermostat for 2 room installation. 30-48kW 415V Export models.	9226-23	\$ 1,250	
	Includes 2 IT1 thermostat controls, 2 sensors, cables, 1 steam solenoid valve assembly and 4 ea. 3/4" Chro		S.	
IT1-M	Boiler mounted thermostat for 1 room installation. For all models. Includes thermostat control, sensor, cables and 2 ea. 3/4" Chrome steam heads.	9226-301	\$ 400	
IT2-M	Boiler mounted thermostat for 2 room installation. 12-24kW, 208V, 240V & 480V.	9226-201	\$ 1,375	
IT2-M	Boiler mounted thermostat for 2 room installation. 12-24kW, 415V Export.	9226-211	\$ 1,375	
IT2-M	Boiler mounted thermostat for 2 room installation. 30-48kW, 208V, 240V & 480V.	9226-221	\$ 1,375	
IT2-M	Boiler mounted thermostat for 2 room installation. 30-48kW 415V Export. All IT2-M units include 2 IT1 thermostat controls, 2 sensors, cables, 1 steam soler valve assembly and 4 ea. 3/4" Chrome steam heads.	9226-231 noid	\$ 1,375	

	Model	Description	ltem No.	List Price
7	ADI	CoolFlush™ auto drain and flush system.	9210-118	\$ 920
	ADI	CoolFlush™ auto drain and flush system. 230V for Export.	9210-119	\$ 920
Company of the local division of the local d	ADI-D	CoolFlush™ auto drain and flush system with Digital Run Clock.	9210-116	\$ 950
Considerations.	ADI-D	CoolFlush™ auto drain and flush system with Digital Run Clock.	9210-117	\$ 950
		230V / for Export		
	IDS	In room "Refresh" control for a quick burst of steam on demand.	9226-05	\$ 270
	160	60 minute timer to control steam flow in steam rooms with intermittent use.	9226-10	\$ 200
	124/7	7 Day Time Clock with 2 hour on/off segments. 120V.	9226-15	\$ 140
1000	124/1	24 Hour Time Clock with 30 minute on/off segments. 120V.	9226-16	\$ 140
	124/7	7 Day Time Clock with 2 hour on/off segments. 230V / 50Hz for Export	9226-17	\$ 140
	124/1	24 Hour Time Clock with 30 minute on/off segments. 230V / 50Hz for Export	9226-18	\$ 140
	D24/7	24 Hour 7 Day Digital Time Clock with Battery Back Up. 120V	9226-19	\$ 250
	D24/7	24 Hour 7 Day Digital Time Clock with Battery Back Up.	9226-191	\$ 250
		230V / for Export		
\sim	CFSH-34	ComfortFlo™ 3/4" Steam Head w/ insulator.	8816-31	\$ 180
		Other finishes available.		
	AROMA	Commercial grade aroma therapy pump with mounting bracket. Single room system. Includes control - IDS Refresh	9223-229	\$ 1,500
S		Commercial grade aroma therapy pump with mounting bracket.	9223-2291	\$ 3,000
- Q.		Two room system. Includes control - IDS Refresh		
	ASX200	Dual Cartridge Scale-X Filter System	9209-020	\$ 765
	ASX200-RFK	ASX200 Filter Replacement Kit	9209-051	\$ 260

Optional controls and accessories for AI Series boilers.

